

Level-Transmitter with internal diaphragm with stainless steel or ceramic element

Accuracy 0,1%, 0,25%, 0,35% und 0,5%

Standard output 4... 20 mA; 2-wire system
 or 0... 20 mA; 3-wire system
 or 0...10 VDC; 3-wire system

Features

- small thermal effect
- good long term stability

Applications


- Level measurement in water, fuel and diesel oil
- water supply, sewage treatment
- depth or level measurement in wells and open waters
- environmental engineering



Model	SD-60	SD-61
Accuracy	0,5 % of full scale value 0,35 % and 0,25 % from 400 mbar 0,1 % from 160 mbar of full scale value	0,5 % of full scale value
Ranges in bar	0...0,1, ...0,16, 0,25, 0,4, 0,6, 1,0, 1,6, 2,5, 4, 6, 10, 16, 25	0...0,6, 1,0, 1,6, 2,5, 4, 6, 10, 16, 25
Ranges in mWS	0...1, ...1,6, 2,5, 4,0, 6,0, 10, 16, 25, 40, 60, 100, 160, 250	0...6, 10, 16, 25, 40, 60, 100, 160, 250
Overload limit	3-x	3-x
Sensor element	Stainless Steel	Ceramic in monolithical construction
Repeability	< 0,05 % full scale value	< 0,05 % full scale value
Stability per year	< 0,1 % full scale value in rated conditions	< 0,2 % full scale value in rated conditions
Case	CrNi steel	CrNi steel
Wetted parts	CrNi-steel	CrNi steel, ceramic Al ₂ O ₃
Electrical connection	PVC-Cable 7,4 mm, or PUR, FEP	
Power supply	12...36 VDC (14...36 VDC for output 0...10 V)	
Power consumption	Output 4...20 mA: signal currency	voltage output 8 mA
Temp. influence	0,2 % / 10 K, zero point and measuring element	
Response time	< 10 ms (within 10% to 90% of full scale value)	
Protection type	IP 68 to EN 60529 /IEC 529	
Temperatures	Medium: -30°C up to 70°C	
Weight	0,2 kg, without cable	

Dimensions and Design

with internal diaphragm

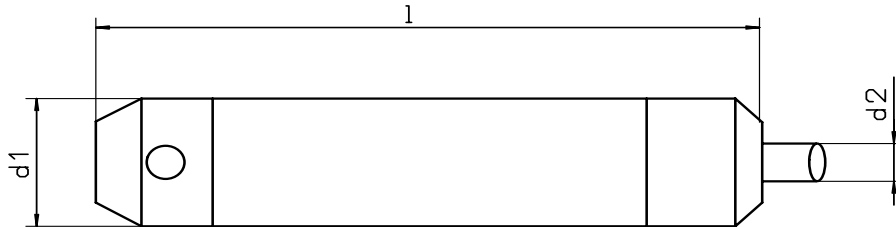

Electrical connection

Two-wire system

4...20 mA



Supply + = white
 Supply - = brown
 Ground = yellow/green (Shield)

Three - wire system

0...20 mA

0...10 V

Supply + = white
 Supply - = brown
 Signal + = green
 Ground = yellow/green (Shield)

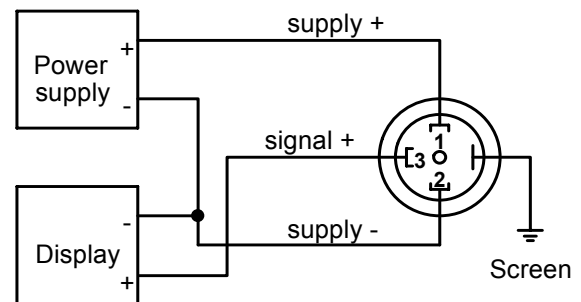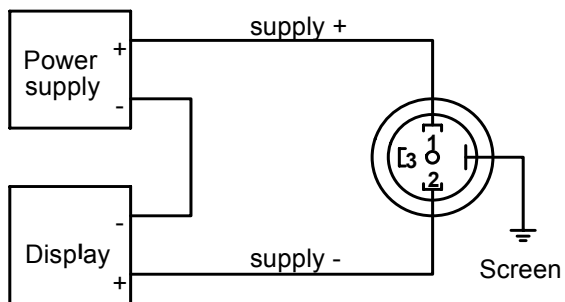

Dimensions in mm					
Type	d1		d2	l	
SD-60	27		7,4	124,5	
SD-61	27		7,4	110	